KWC 17 型號 AAKACZ090 AAKACZ092 系列操作說明書

MODEL AAKACZ090 OR AAKACZ092
INSTRUCTION MANUAL



MECHANICAL 6mm AIR SOFT SPRING
FIXED HOP UP AAKACZ090 SYSTEM
FIXED NON-HOP UP AAKACZ092 SYSTEM
BBS CAPACITY 12 rds. 6mm BB(0.20g)
ENERGY 0.6 joule MAX 78 m/s VELOCITY
MATERIAL 360 g FULL ABS
LENGTH 187 mm
MAGAZINE AAK ACS090

KWC® KIEN WELL TOY INDUSTRIAL CO., LTD
www.kwcgun.com
台南市仁德區義林路168巷89號
NO.89, LN. 168, YILIN RD.,
RENDE DIST., TAINAN CITY
71752, TAIWAN (R.O.C.)
TEL：+886-6-2798175
FAX：+886-6-2798176
sales@kwcgun.com
www.kwcgun.com

低動能遊戲用槍AAKACZ09系列

1.安全裝置：保險作用為防止誤扣鈑機時而不至於擊發


★請參考右邊圖片，為本型號保險開關使用方法。

★請務必聽到切換時保險開關的聲音，以確定保險是處於安全而正確的位置。



2.裝彈方法：請使用 KWC® 指定的BB彈

★壓下彈匣卡榫後便可抽出彈匣

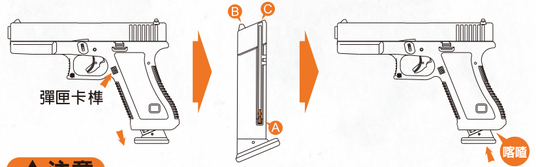

⚠注意

A.本公司為了提高此空氣槍的命中率起見，槍身採用非常精密的槍管。

B.請勿使用非本公司指定及品質粗糙的BB彈射擊。因為這些都是造成卡彈及其他種類故障的原因，請注意若強行使用而導致故障發生時，本公司將不負責一切的修理。

A.將滑粒壓到底端並使其固定住。

B.壓下子彈卡榫，以便裝填子彈。

C.將BB彈裝入(最多12發)。

★ 將彈匣插入，直到聽到”喀噠”聲響後才停止。

3.射擊操作：

A.將保險推到”射擊時”狀態。

B.將上蓋往後拉到底，聽到”喀噠”聲響。

C.確認上蓋是否確實彈回原來的位置。
(若上蓋未完成回到原來位置而扣引鈑機的話，槍身內部活塞將會損壞)

D.扣引鈑機後BB彈被發射出去。

E.若不再繼續發射時，將保險推到”不射擊時”狀態。



⚠注意

A.保管時請將彈匣抽出，並指向安全的方向射擊，務必確定槍中已無BB彈殘留才行。

B.彈匣移除後，並將保險推到”不射擊時”狀態，保管在小孩子無法拿得到的安全場所。

C.請勿將槍在待擊發狀態下做長時間的放置或保管。(此將是發射彈簧性能低下的原因)

⚠WARNING 請務必嚴格遵守 使用操作說明書

此低動能遊戲用槍是針對喜愛射擊運動的消費者所開發。避免因使用方法不正確或改造所發生的故障或事故，請務必詳讀說明書，正確的操作享受愉快的射擊運動。

1.除了發射時外，不要將手指頭掛在板機上。
2.選擇安全與適當標靶
3.在非使用期間，請保持保險關閉且退彈的狀態，就算在非使用狀態，也要如同其已裝彈。
4.如任何的機械產品，槍的保險也可能失效。即使在保險關閉的狀態下也請小心的操作此槍，請勿將槍口對人。
5.千萬不要對堅硬或平坦表面、水面射擊，以避免跳彈。
6.請妥善保管產品在未成年孩童無法伸手取得的場所。
7.每次使用前後都應該檢查擋彈物，假如擋彈物表面有磨損失效或是反彈時請停止使用。
8.請使用高品質BB彈，請勿使用①口徑大於6mm②表面不平滑的③重複使用過的BB彈④非本說明書指名的發射物。
9.檢查任何掉落之槍枝，以確保未影響其功能。

★使用低動能遊戲用槍前，請務必戴上保護眼鏡或面罩。



★使用低動能遊戲用槍前，請務必詳讀說明書內容。



★請不要在公開場合使用低動能遊戲用槍，也請不要拿玩具槍對準人或動物。



★不可攜帶低動能遊戲用槍在公共場所行走，請務必裝在袋子或盒子內。



★請不要由槍口向內探視。



★請確認後再發射BB彈方向，附近無人或動物存在。



★不可任意改造或加工低動能遊戲用槍，私自改造加工會造成產品損壞、保固失效，導致使用上不安全，甚至觸法送辦。



AAKACZ09 系列零件表


圖號	零件名稱
P05	槍管接筒
P06	氣缸卡榫
P07	接筒卡榫
P08	氣缸
P09	活塞
P10	彈簧支座
P24	活塞卡榫
P31	槍柄(左)
P32	槍柄(右)
P33	槍身上蓋
P34	上蓋後罩
P35	氣缸後罩
P36	槍管導管
P37	固定梢
P38	鈑機配件
P39	鈑機
P40	保險
P41	鈑機連桿(左)
P42	鈑機連桿(右)
P43	固定箱(左)
P44	固定箱(右)
P45	彈匣卡榫
P46	鈑機閘片
P47	本體
B03H	槍管
R01	活塞迫緊

圖號	零件名稱
R02	子彈迫緊
F02	平頭軸 (氣缸)
F04	軸 (固定箱用)
F06	軸 (鈑機用)
F07	軸 (鈑機連桿用)
F08	軸 (導管用)
F09	軸 (本體用)
F10	軸 (鈑機配件用)
S03	活塞卡榫扭簧
S04	活塞壓簧
S10	導管壓簧
S11	鈑機閘片壓簧
S12	鈑機配件壓簧
S13	彈匣卡榫壓簧
E06	⊕皿2X5.5束鎚
E07	⊕半丸皿3.0X10尖黑
E08	⊕2.3X12束鎚
F12	槍柄配重
U1	彈匣組件
U2	內槍管組件
U3	鈑機組件

FOR PRIMARY AIRSOFT SPRING GUN SERIES


1.OPERATING THE TRIGGER SAFETY DEVICE:

★Please refer to righ side photo for safety switch operation.
★Make sure to hear the click when switching safety on and off to ensure the safety is in proper position.



2.LOADING BB: Please use KWC granted 6mm BB with this airsoft.

★Press magazine release catch to remove magazine.

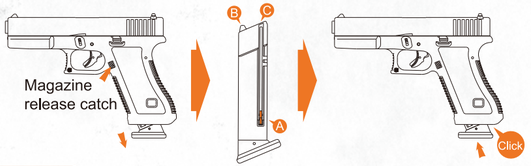

⚠CAUTION


A. As our design effort to produce the most accurate airsoft, we utilize precision aluminum or copper inner barrel.
B. Only use high quality KWC bbs to ensure safe and trouble free operation. The manufacture and its distribution will not be held liable for any incidental or consiquential damages or injuries caused by users using incorrect / improper bbs.

A. Pull the magazine follower down and lock it in place by pushing the follower knob over the stopper.
B. Press the bb catch lever down and hold it down to load bb.
C. Load BB into the magazine. Forcing extra BB into the magazine could damage the follower and the airsoft.

★Firmly re-insert the loaded magazine back into the grip. You will hear a "Click"indicating the magazine is securely locked in place.

3.COCKING AND SHOOTING:

A. Switch safety off.
B. Pull the slide back until you hear a "Click"indication the shot is locked and ready.
C. Make sure that the slide has returned backed to its original position before pulling the trigger.(pulling the trigger before the slide is properly seated will cause internal damage to the air soft gun).
D. Pull the trigger to shoot.
E. Repeat step B for next shot.
F. At the end of use, switch the safety on and remove the magazine.



⚠CAUTION when you have finished shooting

A. Remove the magazine. Cock and shoot the airsoft again at a safe direction 2 to 3 times to ensure no BB is left in barrel.
B. Store the airsoft with magazine removed and safety on. Keep it out of reach of children.
C. Keeping the gun cocked for a long period of time will weaken the piston spring which could cause malfunction.
D. Please avoid dry firing, for it could cause parts deformed or damage.

⚠WARNING For your safefy, please read this manual carefuly before use.

This airsoft is intended for recreational or training purposes.To prevent improper handling, modification or alteration causing malfunction or accident, please read the owner's manual carefully. Enjoy the pleasant shooting experience by proper operation.

1.Do not put your finger on the trigger except shooting.
2.Please choose safe and proper target.
3.Please always keep the airsoft on safe and unloaded when not using.
4.Like all mechanical devices, an airsoft safety can fail. Always handle the airsoft safely even when the safety is "on safe". Never point the airsoft at any people.
5.Avoid ricochet. Never shoot at a hard or flat surface or at water.
6.Keep the airsoft out of reach for small children.
7.Your backstop should be inspected for wear before and after each use. Discontinue use of the backstop if surface shows signs of failure or ricochet.
8.Only use high quality BB. Never use ①BB diameter larger than 6mm②BB with unsmoothed surface③ reused BB that has been fired④incorrect projectiles not design for this airsoft.
9.Check any gun that has been dropped to ensure that its function has not been affected.

★Always wear eye protection when using airsoft.



★Read the owner's manual before using the airsoft.



★Never brandish or aiming this airsoft at any people or domestic animals. Brandish this airsoft in public is dangerous and may be a crime.



★Always transport an airsoft in a locked carrying case. Make sure it is unloaded and on safe.



★To Avoid accidental discharge, do not look directly into the barrel.



★Always be aware of your surrounding before and during shooting and select a safe area for target practice.



★Disassemble, modify, or alter of your airsoft may cause malfunction, void your warranty and may make it unsafe to use.




AAKACZ09 SERIES PARTS LIST

NO.	UNIT
P05	BARREL CONNECTOR
P06	CYLINDER CATCH
P07	CONNECTOR CATCH
P08	CYLINDER
P09	PISTON
P10	SPRING STOCK
P24	PISTON CATCH
P31	GRIP (L)
P32	GRIP (R)
P33	SLIDE
P34	SLIDE REAR CAP
P35	CYLINDER REAR COVER
P36	OUTER BARREL
P37	FIXTURE PIN
P38	TRIGGER ACCESSORY
P39	TRIGGER
P40	SAFETY
P41	TRIGGER BAR (L)
P42	TRIGGER BAR (R)
P43	CHASSIS (L)
P44	CHASSIS (R)
P45	MAGAZINE CATCH
P46	TRIGGER PLATE
P47	FRAME
B03H	INNER BARREL
R01	PISTON PACKING

NO.	UNIT
R02	RUBBER CHAMBER
F02	PIN (CYLINDER)
F04	PIN (CHASSIS)
F06	PIN (TRIGGER)
F07	PIN (TRIGGER BAR)
F08	PIN (OUTER BARREL)
F09	PIN (FRAME)
F10	PIN (TRIGGER ACCESSORY)
S03	PISTON CATCH SPRING
S04	PISTON SPRING
S10	OUTER BARREL SPRING
S11	TRIGGER PLATE SPRING
S12	TRIGGER ACCESSORY SPRING
S13	MAGAZINE CATCH SPRING
E06	SCREW 2X5.5
E07	SCREW 3.0X10
E08	SCREW 2.3X12
F12	GRIP WEIGHT
U1	MAGAZINE UNIT
U2	INNER BARREL UNIT
U3	TRIGGER UNIT

AAKACZ09 系列零件分解圖
AAKACZ09 SERIES EXPLORED VIEW

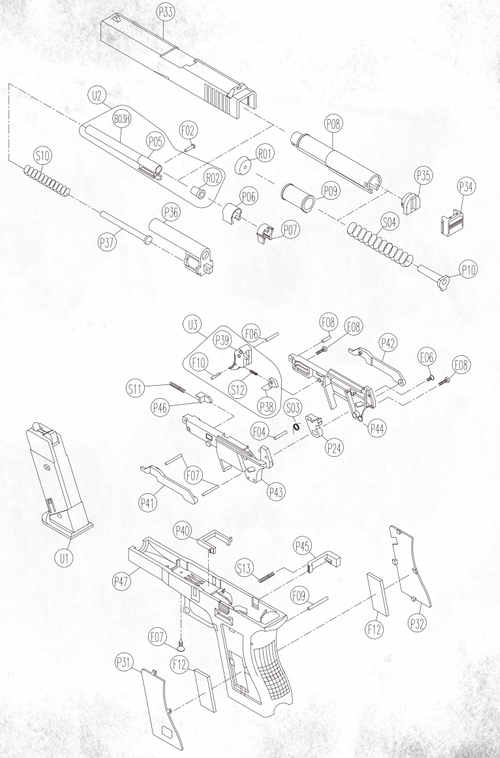

※零件有時為了改良而不經預告變更。
Spare parts may be modified for quality improvement
And such modification may be without advance notice.

K08-00062-N5 2019 09 09