



MODEL KCB-12 系說明書

MODEL KCB-12 INSTRUCTION MANUAL

KWC® KIEN WELL TOY INDUSTRIAL CO., LTD
www.kwcgun.com

台南市東區自由路2段209巷5號
NO.5, LANE 209, SEC. 2,
ZIH YOU RD., EAST DISTRICT
70157, TAINAN, TAIWAN
TEL:+886-6-269-1815
sales@kwcgun.com
www.kwcgun.com



射擊/SHOOTING


射擊前的準備 BEFORE SHOOTING



1. 按下卡榫
Press the button.
2. 取出彈匣
Release the magazine.
3. 使用六角扳手反時針方向取出彈匣底內件。
Use hexagonal wrench to remove the magazine cap by counter clockwise.



4. 逆時針轉出彈匣底內件後，置入小鋼瓶B，再以順時針方向鎖緊彈匣底內件A。當刺破鋼瓶出氣時，請快速鎖緊。
Turn the magazine cap a out counter-clockwise and place CO2 cartridge B inside the magazine. Rapidly turn the screw A clockwise when piercing the cartridge in the magazine.

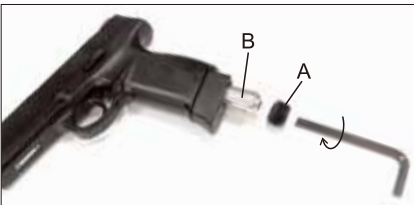

5. 拉下滑粒。
Pull the magazine follower down.
6. 填裝BB彈
Loading BBs
為了使擊發順暢，填裝方法是讓B. B彈在彈匣中一粒接著一粒。
For smooth shooting, Load BBs one by one.

7. 最多可裝22粒。
Maximum BB capacity is 22 rounds.

射擊 SHOOTING

1. 將裝好BB彈的彈匣插入槍身上推入，直到彈匣卡筴發出"卡喀"為止。
Insert fully loaded magazine in the airgun until you hear the sound of "CLICK".



2. 瞄準目標物扣引扳機，即可擊發。
Aim the target and pull the trigger.



3. HOP UP調整
Adjust HOP UP system.




- ※注意：在長期不使用的狀態下，請將彈匣內的氣體洩放掉。
- ※CAUTION：Release all of the gas in the magazine when it is unused in long-term period.

安全裝置 SAFETY

可射擊
SAFETY OFF



保險
SAFETY ON




故障/BREAK DOWN

故障的原因與排除 BREAK DOWN FAQ

1. 不良的B. B彈是造成卡彈的原因，請使用品質優良的KWC B. B彈。
Bad quality BB is the main reason to cause BB jam. Please use the best quality KWC BB to avoid jamming problem.
2. 當卡彈時，請盡可能先取出彈匣，再不以傷槍管的軟質細棒(不可大於5.9mm直徑)，從槍口置入清除。
When you meet with 6 mm BB jam, please release the magazine at first and use the soft stick (no bigger than 5.9mm) to clean the barrel out.
3. 空擊發易造成零件損耗，請避免此動作。
Please avoid dry firing, for it could cause parts deformed or damage.

4. 當扣引扳機時，此時B. B彈即同時在上膛階段，不可扣引一半時又回復，因為如此的動作，將有可能上膛兩發B. B彈。
Pulling trigger will load BB in the barrel. Therefore, please do not pull the trigger half way and release the trigger. This action could load 2 BBs in the pistol and cause jamming.
5. 使用一段時間後，請再次用中性矽油脂潤滑撞針及扳機軸心。
Please spray the lubricant into firing pin and trigger pin.



⚠ WARNING

請務必嚴格遵守 使用說明指導書
READ THIS OWNER'S MANUAL COMPLETELY.

此低動能遊戲用槍是針對喜愛射擊運動的消費者所開發。避免因使用方法不正確或改造所發生的故障或事故，請務必詳讀說明書，正確的操作享受愉快的射擊運動。

1. 除了發射時外，不要將手指頭掛在板機上。
2. 選擇安全與適當目標靶。
3. 在非使用期間，請保持保險關閉且退彈的狀態，就算在非使用狀態，也要如同其已裝彈。
4. 如任何的機械產品，槍的保險也可能失效。即使在保險關閉的狀態下也請小心的操作此槍，請勿將槍口對人。
5. 千萬不要對堅硬或平坦表面、水面射擊，以避免跳彈。
6. 請妥善保管產品在未未成年孩童無法伸手取得的場所。
7. 每次使用前後都應該檢查擋彈物，假如擋彈物表面有磨損失效或是反彈時請停止使用。
8. 請使用高品質BB彈，請勿使用①口徑大於6mm②表面不平滑的③重複使用過的BB彈④非本說明書指名的發射物。
9. 最高的使用及儲藏CO2小鋼瓶環境為50°C(122°F)以內，高溫可能會造成CO2小鋼瓶過熱甚至爆炸。
10. 檢查任何掉落之槍枝，以確保未影響其功能。

This airsoft is intended for recreational or training purposes. To prevent improper handling, modification or alteration causing malfunction or accident, please read the owner's manual carefully. Enjoy the pleasant shooting experience by proper operation.


1. Do not put your finger on the trigger except shooting.
2. Please choose safe and proper target.
3. Please always keep the airsoft on safe and unloaded when not using.
4. Like all mechanical devices, an airsoft safety can fail. Always handle the airsoft safely even when the safety is "on safe". Never point the airsoft at any people.
5. Avoid ricochet. Never shoot at a hard or flat surface or at water.
6. Keep the airsoft out of reach for small children.
7. Your backstop should be inspected for wear before and after each use. Discontinue use of the backstop if surface shows signs of failure or ricochet.
8. Only use high quality BB. Never use ①BB diameter larger than 6mm②BB with unsmoothed surface③reused BB that has been fired④incorrect projectiles not design for this airsoft.
9. Do not expose CO2 cartridges to heat or store them at temperatures above 50°C(122°F). CO2 cartridges may over heat or explode at temperatures above 50°C(122°F).
10. Check any gun that has been dropped to ensure that its function has not been affected.

! WARNING 警告

KCB-12 系列 零件表
KCB-12 SERIES PARTS LIST

KCB-12 系列 零件分解圖
KCB-12 SERIES EXPLODED VIEW

★使用玩具槍前，請務必戴上保護眼鏡或面罩。
★Always wear eye protection when using airsoft.



★不可攜帶玩具槍在公共場所行走，請務必裝在袋子或盒子內。
★Always transport an airsoft in a locked carrying case. Make sure it is unloaded and on safe.



Do not display this pistol in public—it may confuse people and may be a crime. 請不要忘了，雖然自己知道這只是玩具，但不知道的人，會以為這是真槍。


★使用玩具槍前，請務必詳讀說明書內容。
★Read the owner's manual before using the airsoft.




★請不要由槍口向內探視。
★To Avoid accidental discharge, do not look directly into the barrel.




★請不要在公開場合使用玩具槍，也請不要拿玩具槍對準人或動物。
★Never brandish or aiming this airsoft at any people or domestic animals. Brandish this airsoft in public is dangerous and may be a crime.

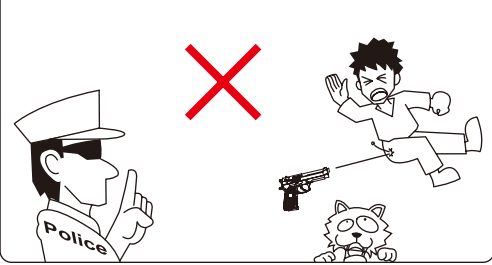

★請確認後再發射BB彈方向，附近無人或動物存在。
★Always be aware of your surrounding before and during shooting and select a safe area for target practice.

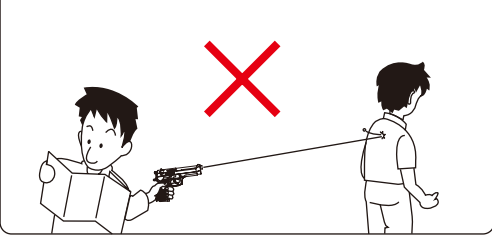


★不可任意改造或加工玩具槍，私自改造加工會造成產品損壞、保固失效，導致使用上不安全，甚至觸法送辦。
★Disassemble, modify, or alter of your airsoft may cause malfunction, void your warranty and may make it unsafe to use.

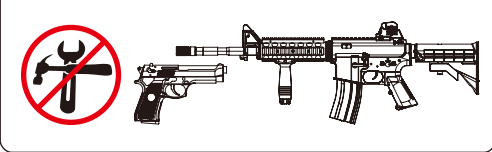

圖號	零件名稱	UNIT
P01	本體	Frame
P08	彈匣卡筭	Magazine catch
KG15-P08	氣缸迫緊	Breech packing
P11-2	扳機一體	Trigger
P17	握柄保險件	Grip Safety
P20	回位壓簧配件	Recoil Spring joint
P21	滑套射嘴	Loading nozzle
P22	氣流控制件1.0J(無肋)	Floating valve
P23	槍管接筒後部	Rubber chamber cover
P24	彈匣滑粒	Magazine follower
P30	後準星	Rear sight
P31	前準星	Front sight
P33	彈匣底件	Magazine joint
P34	彈匣上部	Magazine Rib
P35	上蓋衝擊緩件	Magazine Rib
P60	彈匣底內件	Magazine cap
P409	心棒迫緊	Valve packing
A02N	上蓋	Slide
Z05	槍身內套	Trigger case
Z09	扳機定位件	Trigger lock
Z10	槍管定位件	Barrel joint
Z11	槍管接筒	Barrel hold
Z14	擊鐵箱	Hammer case
Z20	氣缸	Breech
Z21	回位導桿	Recoil spring guide
Z23	槍管導管	Outer barrel
Z30	彈匣本體	Magazine body
Z41	擊鐵定位件	Hammer lock
Z710	擊鐵	Hammer
Z711	撞針本體	Firing pin
Z712	擊鐵卡筭	Hammer catch
F01	上蓋止動片	Slide stop
F02	扳機連桿	Trigger bar
F03	槍號	Serial number plate
KG15-F03	彈匣底內件配件	magazine cap plate
F04	彈片	Spring plate
F713	撞針	Sear
F714	撞針本體卡筭	Firing pin catch
R02	子彈迫緊	RUBBER CHAMBER
R04	O型環 1x8id(NBR)	O-RING 1X8
R05	氣瓶頂針迫緊	CARTRIDGE VALVE PACKING

圖號	零件名稱	UNIT
R06	氣嘴迫緊	GAS ROUTE PACKING
KG15-R06	O型環 2x15	O-RING 2X15
R07	O型環 0.8x11.3id	O-RING 0.8X11.3
R08	O型環 S-4	O-RING S-4
B05	槍管	Barrel
B06	軸	Pin
B07	軸	Pin
B08	軸套	Sleeve
B09	軸	Pin
B10	軸	Pin
B12	軸套	Sleeve
B13	軸	Pin
B15	心棒蓋	Valve cap
B20	彈匣上部軸	Magazine rib pin
B30	氣瓶頂針	Inner valve
B31	氣閥本體	Valve body
KG15-B33	心棒	Valve
B41	軸(擊鐵定位件)	Hammer catch pin
B711	撞針軸	Firing pin sleeve
B712	滑輪	Hammer rotary
B715	擊鐵滑輪軸	Hammer rotary sleeve
S01	彈匣壓簧	Magazine spring
S02	氣流控制件回位壓簧	Floating valve recoil spring
S05	上蓋回位壓簧	Recoil spring
S06	扳機連桿拉簧	Trigger bar spring
S07	滑套回位拉簧	Recoil spring
S08	保險扭簧	Safety spring
S09	彈匣卡筭線簧	Magazine catch spring
S10	擊鐵扭簧	Hammer spring
S15	上蓋止動片扭簧	Slide stop spring
S20	心棒壓簧	Valve spring
S41	擊鐵定位件扭簧	Hammer catch spring
S718	撞針扭簧	Firing pin spring
S719	撞針本體扭簧	Firing pin body spring
E01	螺絲M2.3x6	Screw
E02	螺絲3.0x 8	Screw
E04	螺絲2.6x 4	Screw
E05	螺絲M3.0x8	Screw
E12	彈簧墊圈M3*0.6T	Floating valve spring ring
U1	六角扳手	Hexagonal wrench

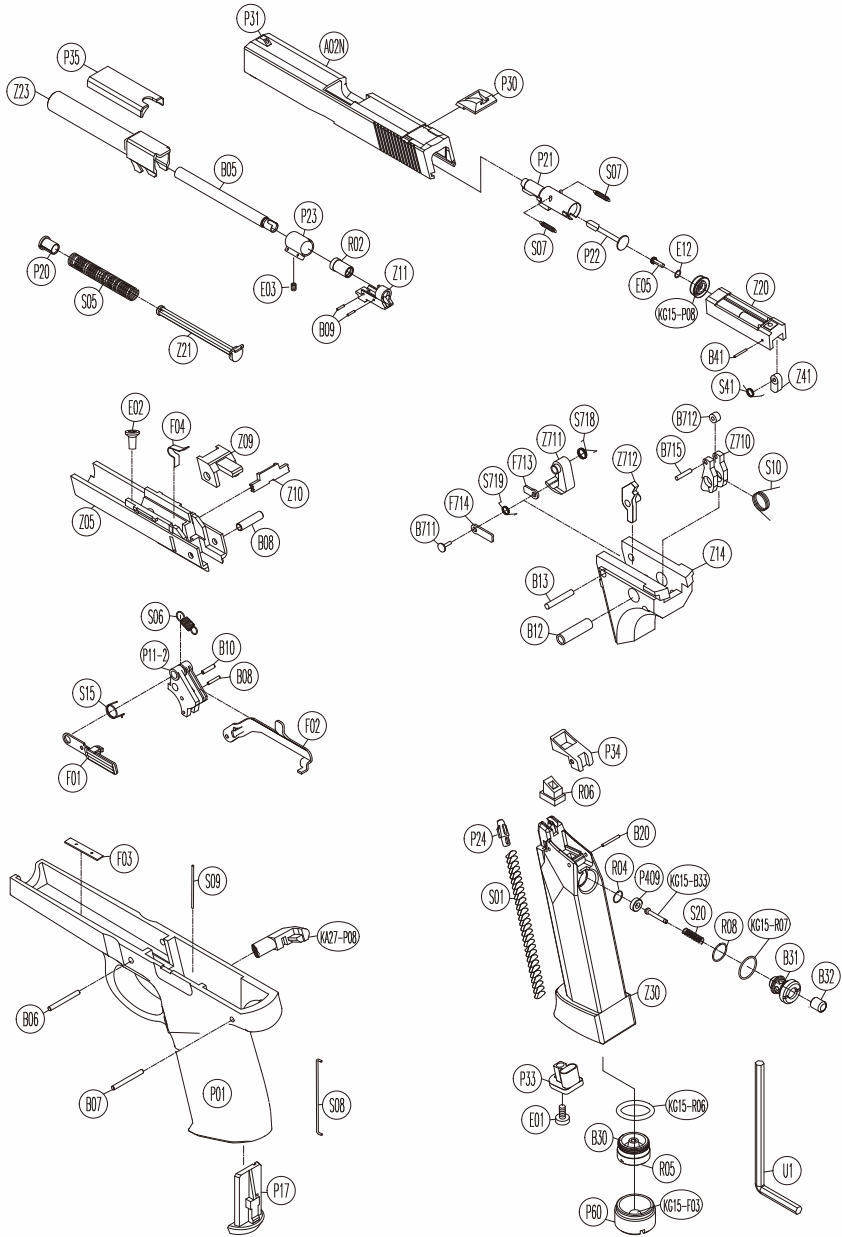

※零件有時為了改良而不經預告變更。
Spare parts may be modified for quality improvement
And such modification may be without advance notice.